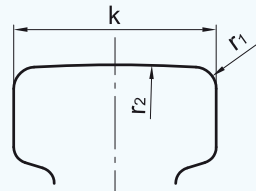


Table 1. **Symbol and unit**

symbol	unit	description	explanation
c1	-	material coefficient	Values in accordance with table 2
c2	-	speed coefficient	Values in accordance with table 3a and 3b
c3	-	operating time coefficient	Values in accordance with table 4
d1	mm	Travelling wheel diameter	Running surface diameter
n	min ⁻¹	Speed of crane wheel	Values in accordance with table 3b
p	N/mm ²	pressure	$p = \frac{R}{c_2 \cdot c_3 \cdot d_1 (k - 2r_1)}$
p _{zul}	N/mm ²	Permissible pressure between crane wheel and rail	p _{zul} = 5,6 c ₁
k	mm	Rail head width	 <p>For cambered crane rails the ideal effective rail head width will be k - 2r₁.</p>
r1	mm	Radius of curvature of rail head	
r2	mm	Radius of camber of rail head	
k - 2r ₁	mm	Ideal effective rail head width	Values for crane rails in accordance with table 5
v	m/min	Speed of crane wheel	
R	N	Wheel force	For crane travelling wheels $R = \frac{R_{\min} + 2R_{\max}}{3}$ For trolley travelling wheels R = R _{max}
R _{max}	N	Maximum wheel force	R _{max} and R _{min} should be determined from the most frequent operating positions of the loaded trolley
R _{min}	N	Minimum wheel force	
R ₀	N	Characteristic wheel force	Values in accordance with table 6

Calculation of crane rail wheels

The wheel force is calculated using the formula:

$$R \leq p_{zul} \cdot c_2 \cdot c_3 \cdot d_1 \cdot (k - 2r_1) \quad (1)$$

From the above is obtained the crane wheel diameter

$$d_1 \geq \frac{R}{p_{zul} \cdot c_2 \cdot c_3 \cdot (k - 2r_1)} \quad (2)$$

The characteristic wheel force R₀ is obtained from equation (1), where:

$$\begin{aligned} p_{zul} &= 5,6 \text{ N/mm}^2 \\ c_2 &= 1 \\ c_3 &= 1 \end{aligned}$$

are applied for R₀ = 5,6 · d₁ · (k - 2r₁) (3)

When using the characteristic wheel force the permissible wheel force can be calculated in simplified fashion using the formula:

$$R \leq R_0 \cdot c_1 \cdot c_2 \cdot c_3 \quad (4)$$

Rail/crane wheel material matching

Table 2. **Permissible pressure p_{zul} and material coefficient c₁**

rail	material minimum tensile strength [N/mm ²]		p _{zul} [N/mm ²]	c ₁
	rail	wheel		
590		≤ 330	2,8	0,50
		410	3,6	0,63
		490	4,5	0,80
		590	5,6	1,00
		≥ 740	7,0	1,25
≥ 690		≥ 800	7,2	1,29
		≥ 900	7,8	1,39
≥ 700		≥ 1000	8,5	1,52

The hardening of the running surfaces with a depth of 0,01·diameter can be considered selecting p_{zul}.

Table 3a. speed coefficient c2

wheel-Ø	c2															
	for v in m/min															
	d1	10	12,5	16	20	25	31,5	40	50	63	80	100	125	160	200	250
200	1,09	1,06	1,03	1	0,97	0,94	0,91	0,87	0,82	0,77	0,72	0,66	-	-	-	
250	1,11	1,09	1,06	1,03	1	0,97	0,94	0,91	0,87	0,82	0,77	0,72	0,66	-	-	
315	1,13	1,11	1,09	1,06	1,03	1	0,97	0,94	0,91	0,87	0,82	0,77	0,72	0,66	-	
400	1,14	1,13	1,11	1,09	1,06	1,03	1	0,97	0,94	0,91	0,87	0,82	0,77	0,72	0,66	
500	1,15	1,14	1,13	1,11	1,09	1,06	1,03	1	0,97	0,94	0,91	0,87	0,82	0,77	0,72	
630	1,17	1,15	1,14	1,13	1,11	1,09	1,06	1,03	1	0,97	0,94	0,91	0,87	0,82	0,77	
710	-	1,16	1,14	1,13	1,12	1,1	1,07	1,04	1,02	0,99	0,96	0,92	0,89	0,84	0,79	
800	-	1,16	1,15	1,14	1,13	1,11	1,09	1,06	1,03	1	0,97	0,94	0,91	0,87	0,82	
900	-	-	1,16	1,14	1,13	1,12	1,1	1,07	1,04	1,02	0,99	0,96	0,92	0,89	0,84	
1000	-	-	1,17	1,15	1,14	1,13	1,11	1,09	1,06	1,03	1	0,97	0,94	0,91	0,87	
1100	-	-	-	1,16	1,14	1,13	1,12	1,1	1,07	1,04	1,02	0,99	0,96	0,92	0,89	
1250	-	-	-	1,17	1,15	1,14	1,13	1,11	1,09	1,06	1,03	1	0,97	0,94	0,91	

Tabelle 3b.

wheel speed n from speed coefficient c2	
c2	n≈ [min ⁻¹]
0,66	200
0,72	160
0,77	125
0,79	112
0,82	100
0,84	90
0,87	80
0,89	71
0,91	63
0,92	56
0,94	50
0,96	45
0,97	40
0,99	35,5
1	31,5
1,02	28
1,03	25
1,04	22,4
1,06	20
1,07	18
1,09	16
1,1	14
1,11	12,5
1,12	11,2
1,13	10
1,14	8
1,15	6,3
1,16	5,6
1,17	5

Table 4. operating time coefficient c3

operating time of travelling gear (referred to 1 hour)	c3
bis 16%	1,25
über 16 bis 25%	1,12
über 25 bis 40%	1
über 40 bis 63%	0,9
über 63%	0,8

Tabelle 5. ideal effective rail head width (k-2r1)


as per	crane rails		r1	k-2r1
	designation			
	DIN	new	previous	mm
536 Teil 1	A 45	KS 22	4	37
	A 55	KS 32	5	45
	A 65	KS 43	6	53
	A 75	KS 56	8	59
	A 100	KS 75	10	80
	A 120	KS 101	10	100
536 Teil 2	F 100	-	5	90
	F 120	-	5	110

Tabelle 6. characterisitc wheel force R₀

wheel-Ø	R ₀ in N for narroc wheels				R ₀ in N for broad wheels					R ₀ in N for wheels without wheelflange		
	for crane rail				for crane rail					for crane rail		
	d1	A 45	A 55	A 65	A 75	A 55	A 65	A 75	A 100	A 120	F 100	F 120
200	41000	50000	-	-	-	-	-	-	-	-	-	-
250	52000	63000	-	-	-	-	-	-	-	-	-	-
315	65000	79000	-	-	79000	93000	-	-	-	-	-	-
400	83000	101000	-	-	101000	119000	132000	-	-	-	202000	-
500	104000	126000	-	-	126000	148000	165000	-	-	-	252000	-
630	-	159000	187000	-	-	187000	208000	282000	-	-	318000	388000
710	-	178000	211000	235000	-	-	235000	318000	398000	-	358000	437000
800	-	201000	237000	264000	-	-	264000	358000	448000	-	403000	493000
900	-	-	267000	297000	-	-	297000	403000	504000	-	454000	554000
1000	-	-	297000	330000	-	-	330000	448000	560000	-	504000	616000
1120	-	-	-	-	-	-	-	502000	627000	-	-	-
1250	-	-	-	-	-	-	-	560000	700000	-	-	-

Running surface profiles of crane wheels and correlation of crane rails to wheel-diameter

DIN 15 072

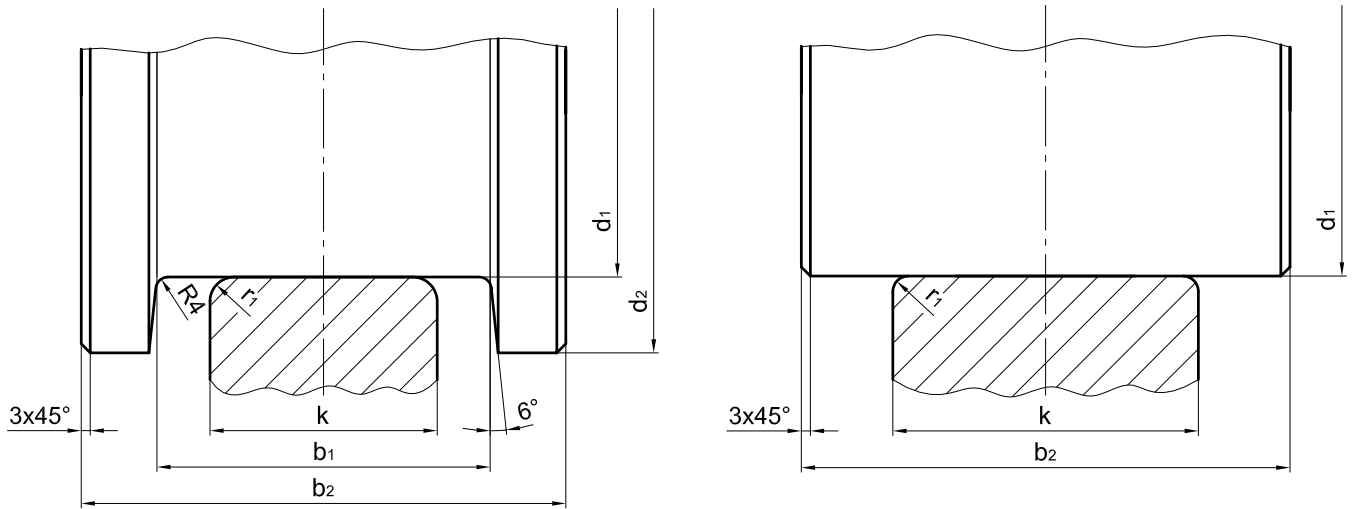

Crane wheels with wheel flange

Crane wheels without wheel flange


Crane wheel-Ø d1	d2	for crane wheels with narrow wheel flange						for crane wheels with broad wheel flange						for crane wheels without wheel flange			
		for crane rail ¹⁾				b1	b2	for crane rail ¹⁾				b1	b2	for crane rail ²⁾		b2	
		A 45	A 55	A 65	A 75			A 55	A 65	A 75	A 100			A 120	F 100		F 120
h9	k				max.	k				max.	k						
200	230	45	-	-	-	55	90	-	-	-	-	-	-	-	-	-	-
250	280	45	-	-	-	55	90	-	-	-	-	-	-	-	-	-	-
315	350	45	-	-	-	55	90	55	-	-	-	-	65	110	-	-	-
400	440	45	55	-	-	65	110	55	65	75	-	-	90	140	100	-	140
500	540	45	55	-	-	65	110	55	65	75	-	-	90	140	100	-	140
630	680	-	55	65	-	75	120	-	65	75	100	-	110	160	100	120	160
710	760	-	-	65	75	90	140	-	-	75	100	120	160	210	100	120	210
800	850	-	-	65	75	90	140	-	-	75	100	120	160	210	100	120	210
900	950	-	-	65	75	90	140	-	-	75	100	120	160	210	-	120	210
1000	1050	-	-	65	75	90	140	-	-	75	100	120	160	210	-	120	210
1120	1180	-	-	-	-	-	-	-	-	-	100	120	160	220	-	-	-
1250	1310	-	-	-	-	-	-	-	-	-	100	120	160	220	-	-	-
r ₁		4	5	6	8	-	-	5	6	8	10	10	-	-	5	5	-

1) Crane rail acc. to DIN 536-1.

2) Crane rail acc. to DIN 536-2.

Champignon rail acc. to DIN 536


main dimensions for information, dimensions can vary depending on the producer

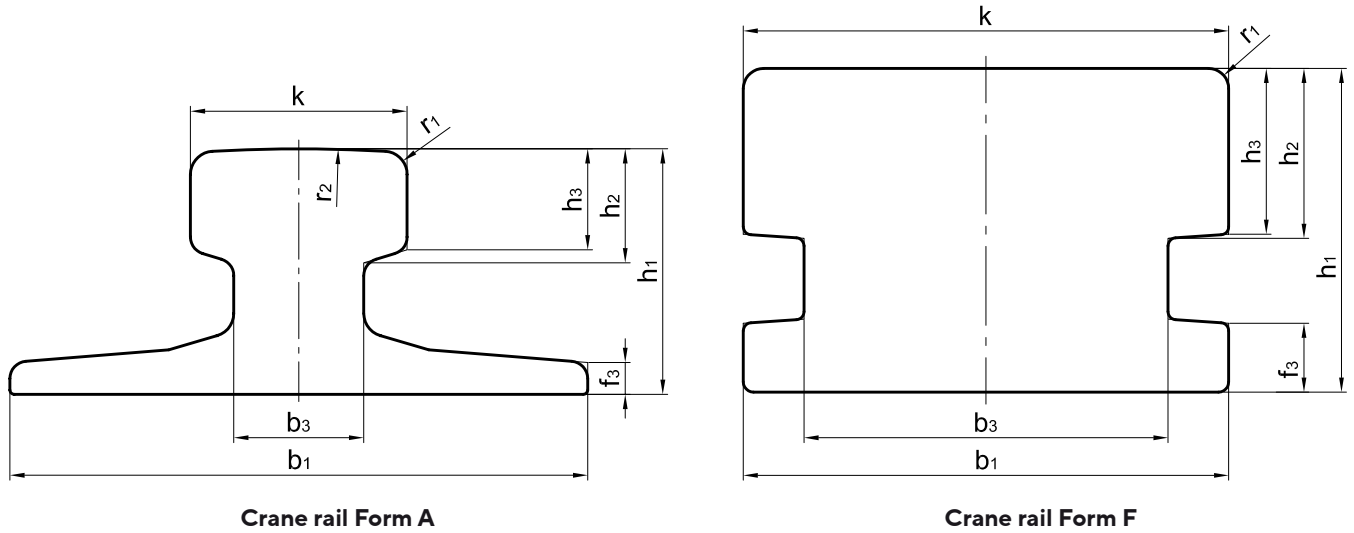

nominal size	k	b1	b3	h1	h2	h3	f3	r1	r2	ideal effective rail head width $k - 2r_1$ (acc. to DIN 15070)
A 45	45	125	24	55	24	20	8	4	400	37
A 55	55	150	31	65	28,5	25	9	5	400	45
A 65	65	175	38	75	34	30	10	6	400	53
A 75	75	200	45	85	39,5	35	11	8	500	59
A 100	100	200	60	95	45,5	40	12	10	500	80
A 120	120	220	72	105	55,5	47,5	14	10	600	100
A 150	150	220	80	150	64,5	50	14	10	800	130
F 100	100	100	70	80	42	41	17	5	-	90
F 120	120	120	90	80	42	41	17	5	-	110

Champignon rail acc. to DIN EN 13 674-1 (DIN 5901) and UIC

main dimensions for information, dimensions can vary depending on the producer

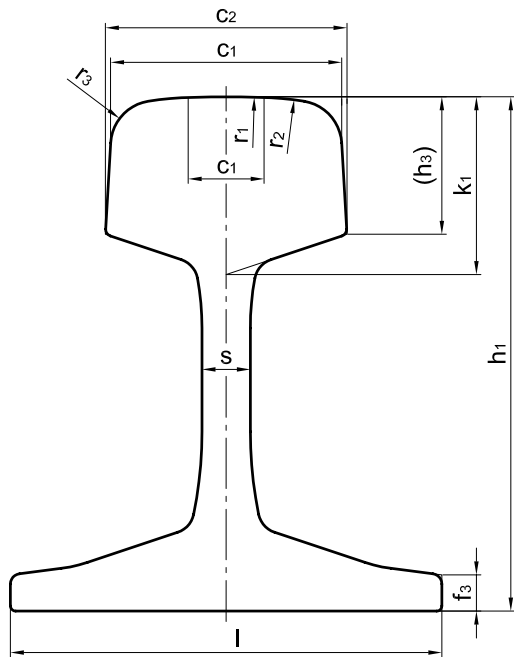

Champignon rail (Form S and UIC)

nominal size	c1	c2	c3	l	s	h1	k1	(h3)	f3	r1	r2	r3
S 30	60,3	1)	1)	108	12,3	108	31	24	7	305	1)	8
S 33	58	1)	1)	105	11	134	39	31,75	9,5	225	1)	14
S 41 R 10	67	1)	1)	125	12	138	43	31,83	9,5	400	1)	10
S 41 R 14	67	1)	1)	125	12	138	43	31,83	9,5	400	1)	14
S 49	67	70	19	125	14	149	51,5	39,80	10,5	300	80	13
S 54	67	70	16,703	125	16	154	55	43,30	12	300	80	13
UIC 50	70	72,2	20,025	125	15	152	49,4	36,30	10	300	80	13
UIC 54	70	72,2	20,024	140	16	159	49,4	36,30	11	300	80	13
UIC 60	72	74,3	20,456	150	16,5	172	51	37,50	11,5	300	80	13

1) Dimensions undetermined