


# ATLAS WHEEL BLOCK SYSTEM RB 315

Drive shafts suitable for slip-on gear mechanisms from other manufacturers on request.

## Central drive unit

Both wheel blocks are driven with only one gear motor  
(Splined-shaft profile, feather key connection and shrink disc attachment)

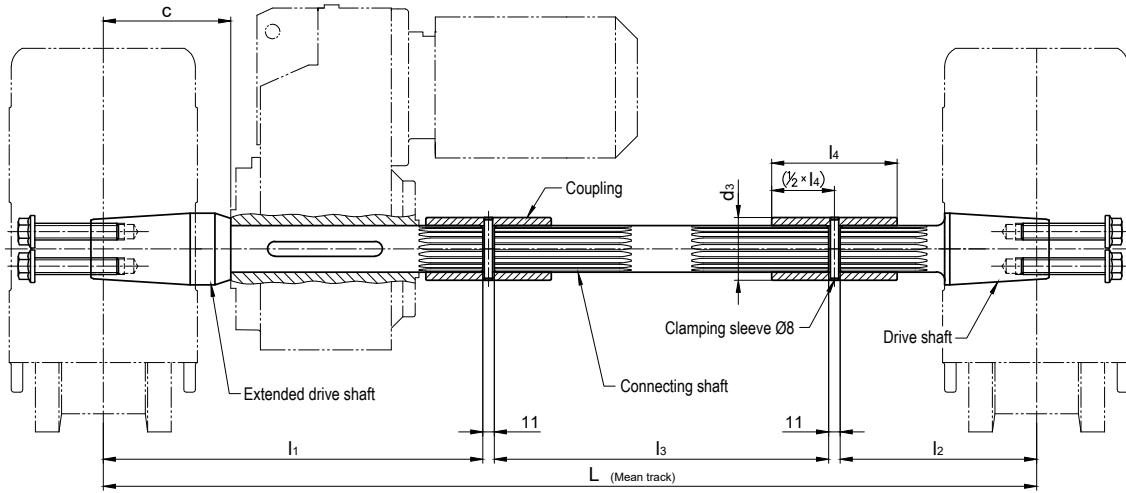

For gearboxes with hollow shaft and feather key connection in acc. with DIN 6885

Suitable for gearboxes with hollow shaft		L	I1	I2	I3	c gearbox stop	Feather key DIN 6885	Coupling Internal gearing/ d3 x I4
Inner-Ø	Length							
Ø40	≤ 185	For ordering, please provide	385	178	Dimension L minus 585	140	A 12 x 8 x 100	N40 x 2 x 18 Ø55 x 100
Ø50	≤ 210		420	178	Dimension L minus 620	140	A 14 x 9 x 110	N50 x 2 x 24 Ø65 x 120
Ø60	≤ 240		450	178	Dimension L minus 650	140	A 18 x 11 x 110	N50 x 2 x 24 Ø65 x 120

Suitable for gearboxes of the following manufacturers:

Siemens Motox (Flender), Bauer (Danfoss), KEB, Lenze, Nord, PREMIUM STEPHAN, SEW, Siemens, Stöber, Demag

Et.al. suitable type designations, refer to the single drive unit.

Drive shafts without gearbox stop and with adapted distance (c) on request.