


ATLAS WHEEL BLOCK SYSTEM RB 200

Drive shafts suitable for slip-on gear mechanisms from other manufacturers on request.

Central drive unit

Both wheel blocks are driven with only one gear motor
(Splined-shaft profile, feather key connection and shrink disc attachment)

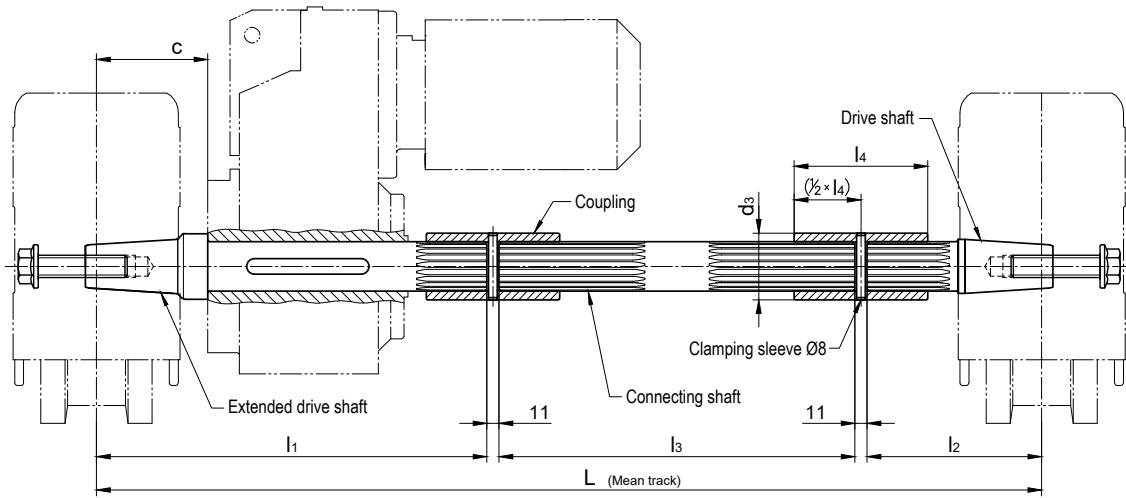

For gearboxes with hollow shaft and feather key connection in acc. with DIN 6885

Suitable for gearboxes with hollow shaft		L	l1	l2	l3	c Getriebe- anschlag	Feather key DIN 6885	Coupling Internal gearing/ d3 x l4
Inner-Ø	Length							
Ø30	≤ 150	For ordering, please provide	310	128	Dimension L minus 460	110	A 8 x 7 x 70	N30 x 1,25 x 22 Ø40 x 80
Ø35	≤ 160		330	138	Dimension L minus 490	110	A 10 x 8 x 80	N35 x 2 x 16 Ø50 x 100
Ø40	≤ 180		350	148	Dimension L minus 520	110	A 12 x 8 x 100	N40 x 2 x 18 Ø55 x 100
Ø50	≤ 210		410	148	Dimension L minus 580	120	A 14 x 9 x 110	N45 x 2 x 21 Ø60 x 120

Suitable for gearboxes of the following manufacturers:

Siemens Motox (Flender), Bauer (Danfoss), KEB, Lenze, Nord, PREMIUM STEPHAN, SEW, Siemens, Stöber, Demag

Et.al. suitable type designations, refer to the single drive unit.

Drive shafts without gearbox stop and with adapted distance (c) on request.