


Installation and Maintenance Instructions

HORIZONTAL ROLLER GUIDE



FOR
RB 400



KARL GEORG



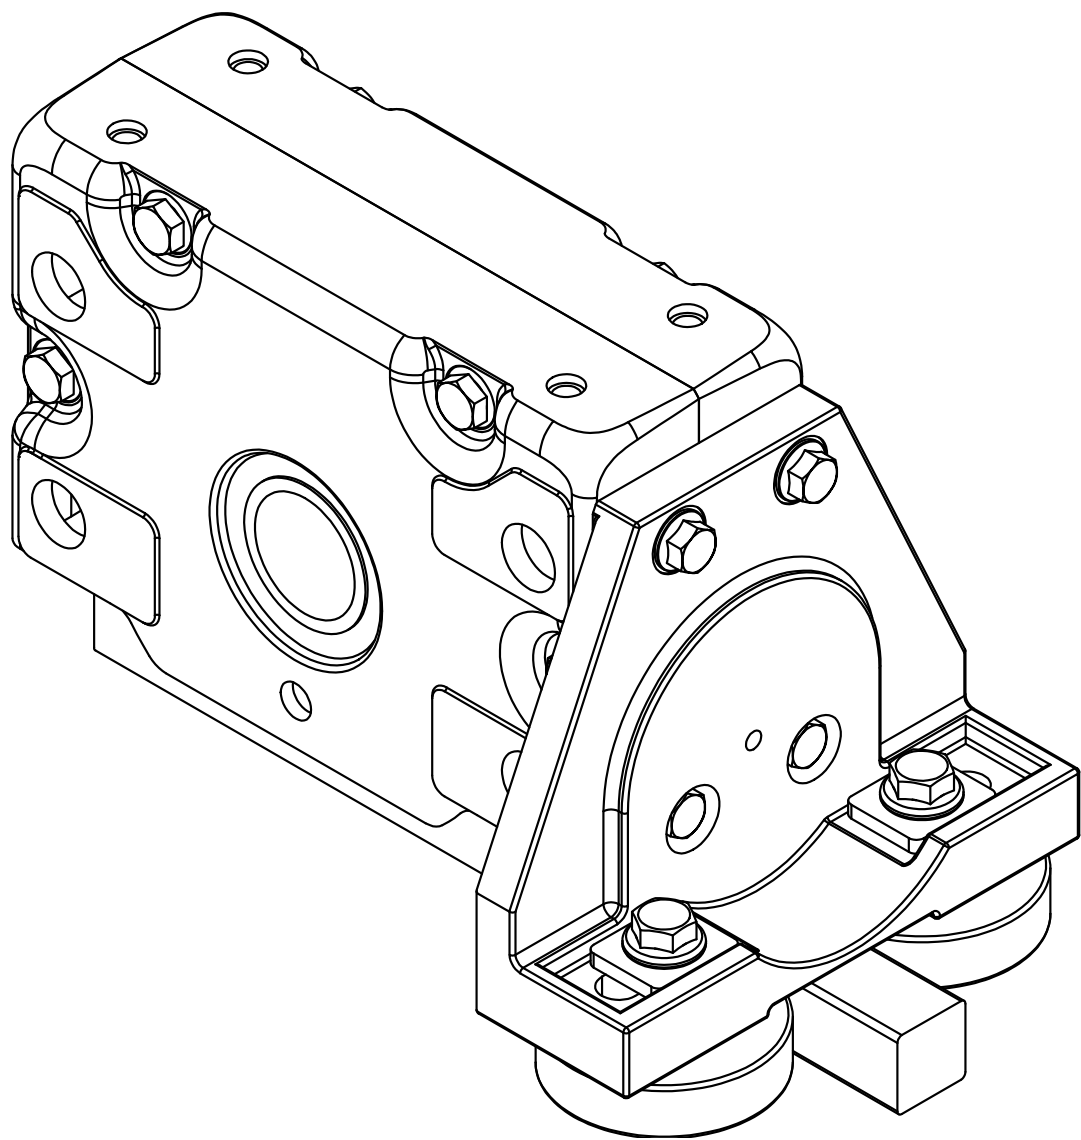


HORIZONTAL ROLLER GUIDE

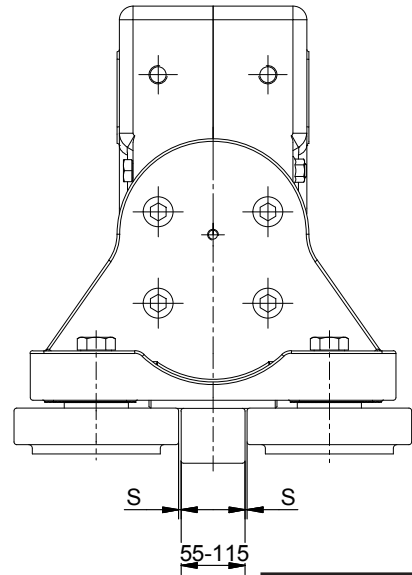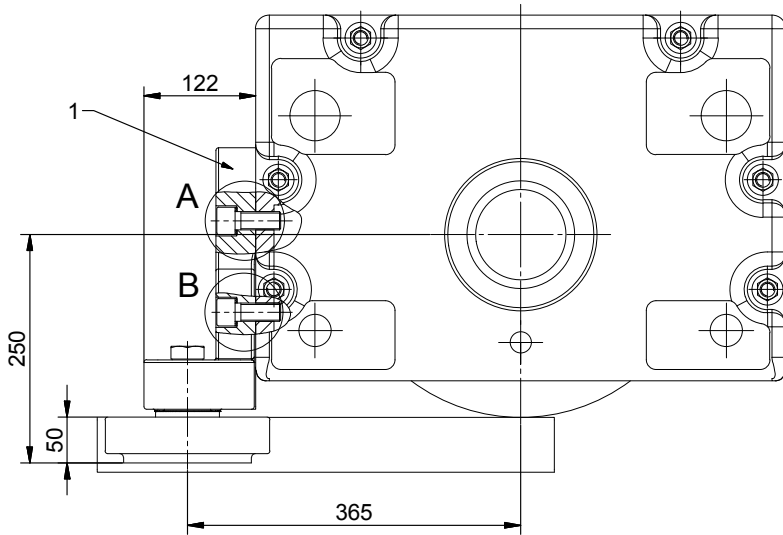

DETAIL A+B

s = 5 mm maximum
1 mm minimum

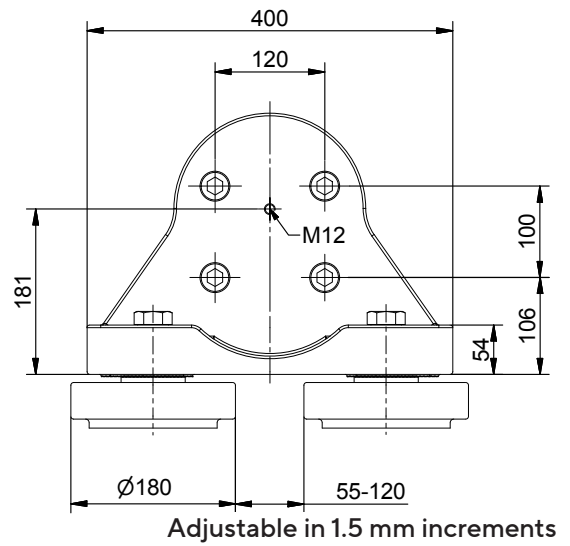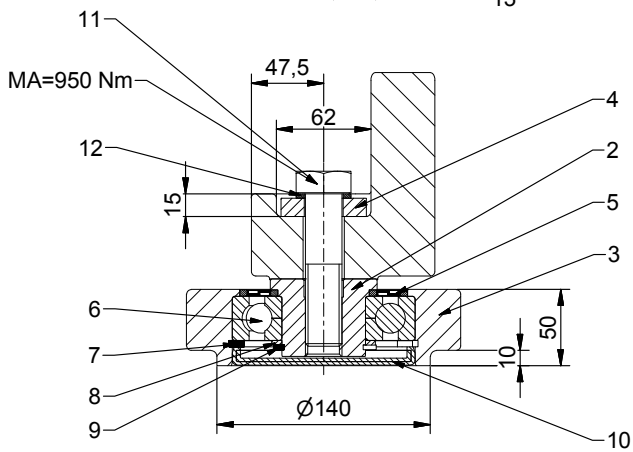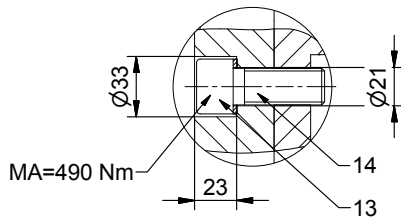

USE

For the lateral guidance of a wheel block unit.

During use, you absolutely must pay attention to the type of rail mounting and design of the rail; a use on rails with oblique addendum flanks is not permitted.

LOAD

Permissible horizontal load, maximum of 15% of the existing road load.

20% of the existing wheel load in case of a mounting of the roller guide to the customer structure.

ASSEMBLY

1. Mount the holder (1) with guide rollers and the hexagon socket head screws (14) with lock washers (13) to the wheel block.
2. Tighten the hexagon socket head screw (14) to a nominal torque of MA=490 Nm.
3. Align the guide rollers to the rail and adjust the roller distance dimension "S".
(The toothing of the holder and guide roller (bolt) must mesh during mounting)
4. Tighten the locking screws (11) to a nominal torque of MA=950Nm.

MAINTENANCE

The roller bearing is sealed with a steel disc seal at the top and a cap at the bottom and does not offer a relubricating possibility through a lubricating nipple.

By standard, the bearing is lubricated with a high-performance grease for an application range from -30°C to +90°C (Multifak EP2 of Texaco).

In case of use under different conditions, other greases are also possible, but must be specified separately in the order.

SERVICING

Retighten connection bolts to the nominal torque after 3-6 operating hours and then repeat this procedure after an additional three months.

Subsequently in accordance with the conditions of use and operating conditions, but at least once a year (refer to BGV D6, Accident Prevention Regulations for Cranes).

INDIVIDUAL PARTS OF ROLLER GUIDE

Part no.	Quantity	Designation
1	1	Holder - KG 1.01.13495
2	2	Bolt Ø 70 x 51 - KG
3	2	Guide roller Ø 180 x 50 - KG
4	2	Disc 56 x 64 x 12 - KG
5	2	Steel disc seal 60 x 110 - LSTO
6	2	Four-point bearing DIN 628-4 - QJ 311
7	2	Circlip DIN 472 - Ø 120 x 4
8	2	Spacer DIN 988 - Ø 55 x 3
9	2	Circlip DIN 471 - Ø 55 x 3
10	2	Cap Ø 120 x 12 - NBR
11	2	Hexagon screw DIN 931 - M 24 x 100 - 10.9 ZT
12	2	Schnorr disc Ø 24 - FSt-Zn
13	4	Schnorr disc Ø 20 - FSt-Zn
14	4	Cylinder screw DIN 912 - M 20 x 50 - 10.9ZT

NOTICE:



Karl Georg GmbH
Karl-Georg-Straße 3
D-57612 Ingelbach-Bahnhof

T: +49 (0)2688 / 95 16 - 0
info@karl-georg.de
www.karl-georg.de

Subject to alterations by the manufacturer for the purposes of further technical development!

Thus, no claims can be derived from the information, figures and descriptions given in these operating instructions.

© 09/2024 Karl Georg GmbH

Reprinting, duplication or translation, also as extract, is not permitted without previous written consent of Karl Georg GmbH. All rights are expressly reserved for Karl Georg GmbH according to the copyright law. Subject to alterations

Printed in Germany